


- Remove 4.7K resistor and solder a jumper wire in its place
- (3) Remove wire connecting CS to 3.5mm jack(CLK Switch) & replace with a 47K resistor

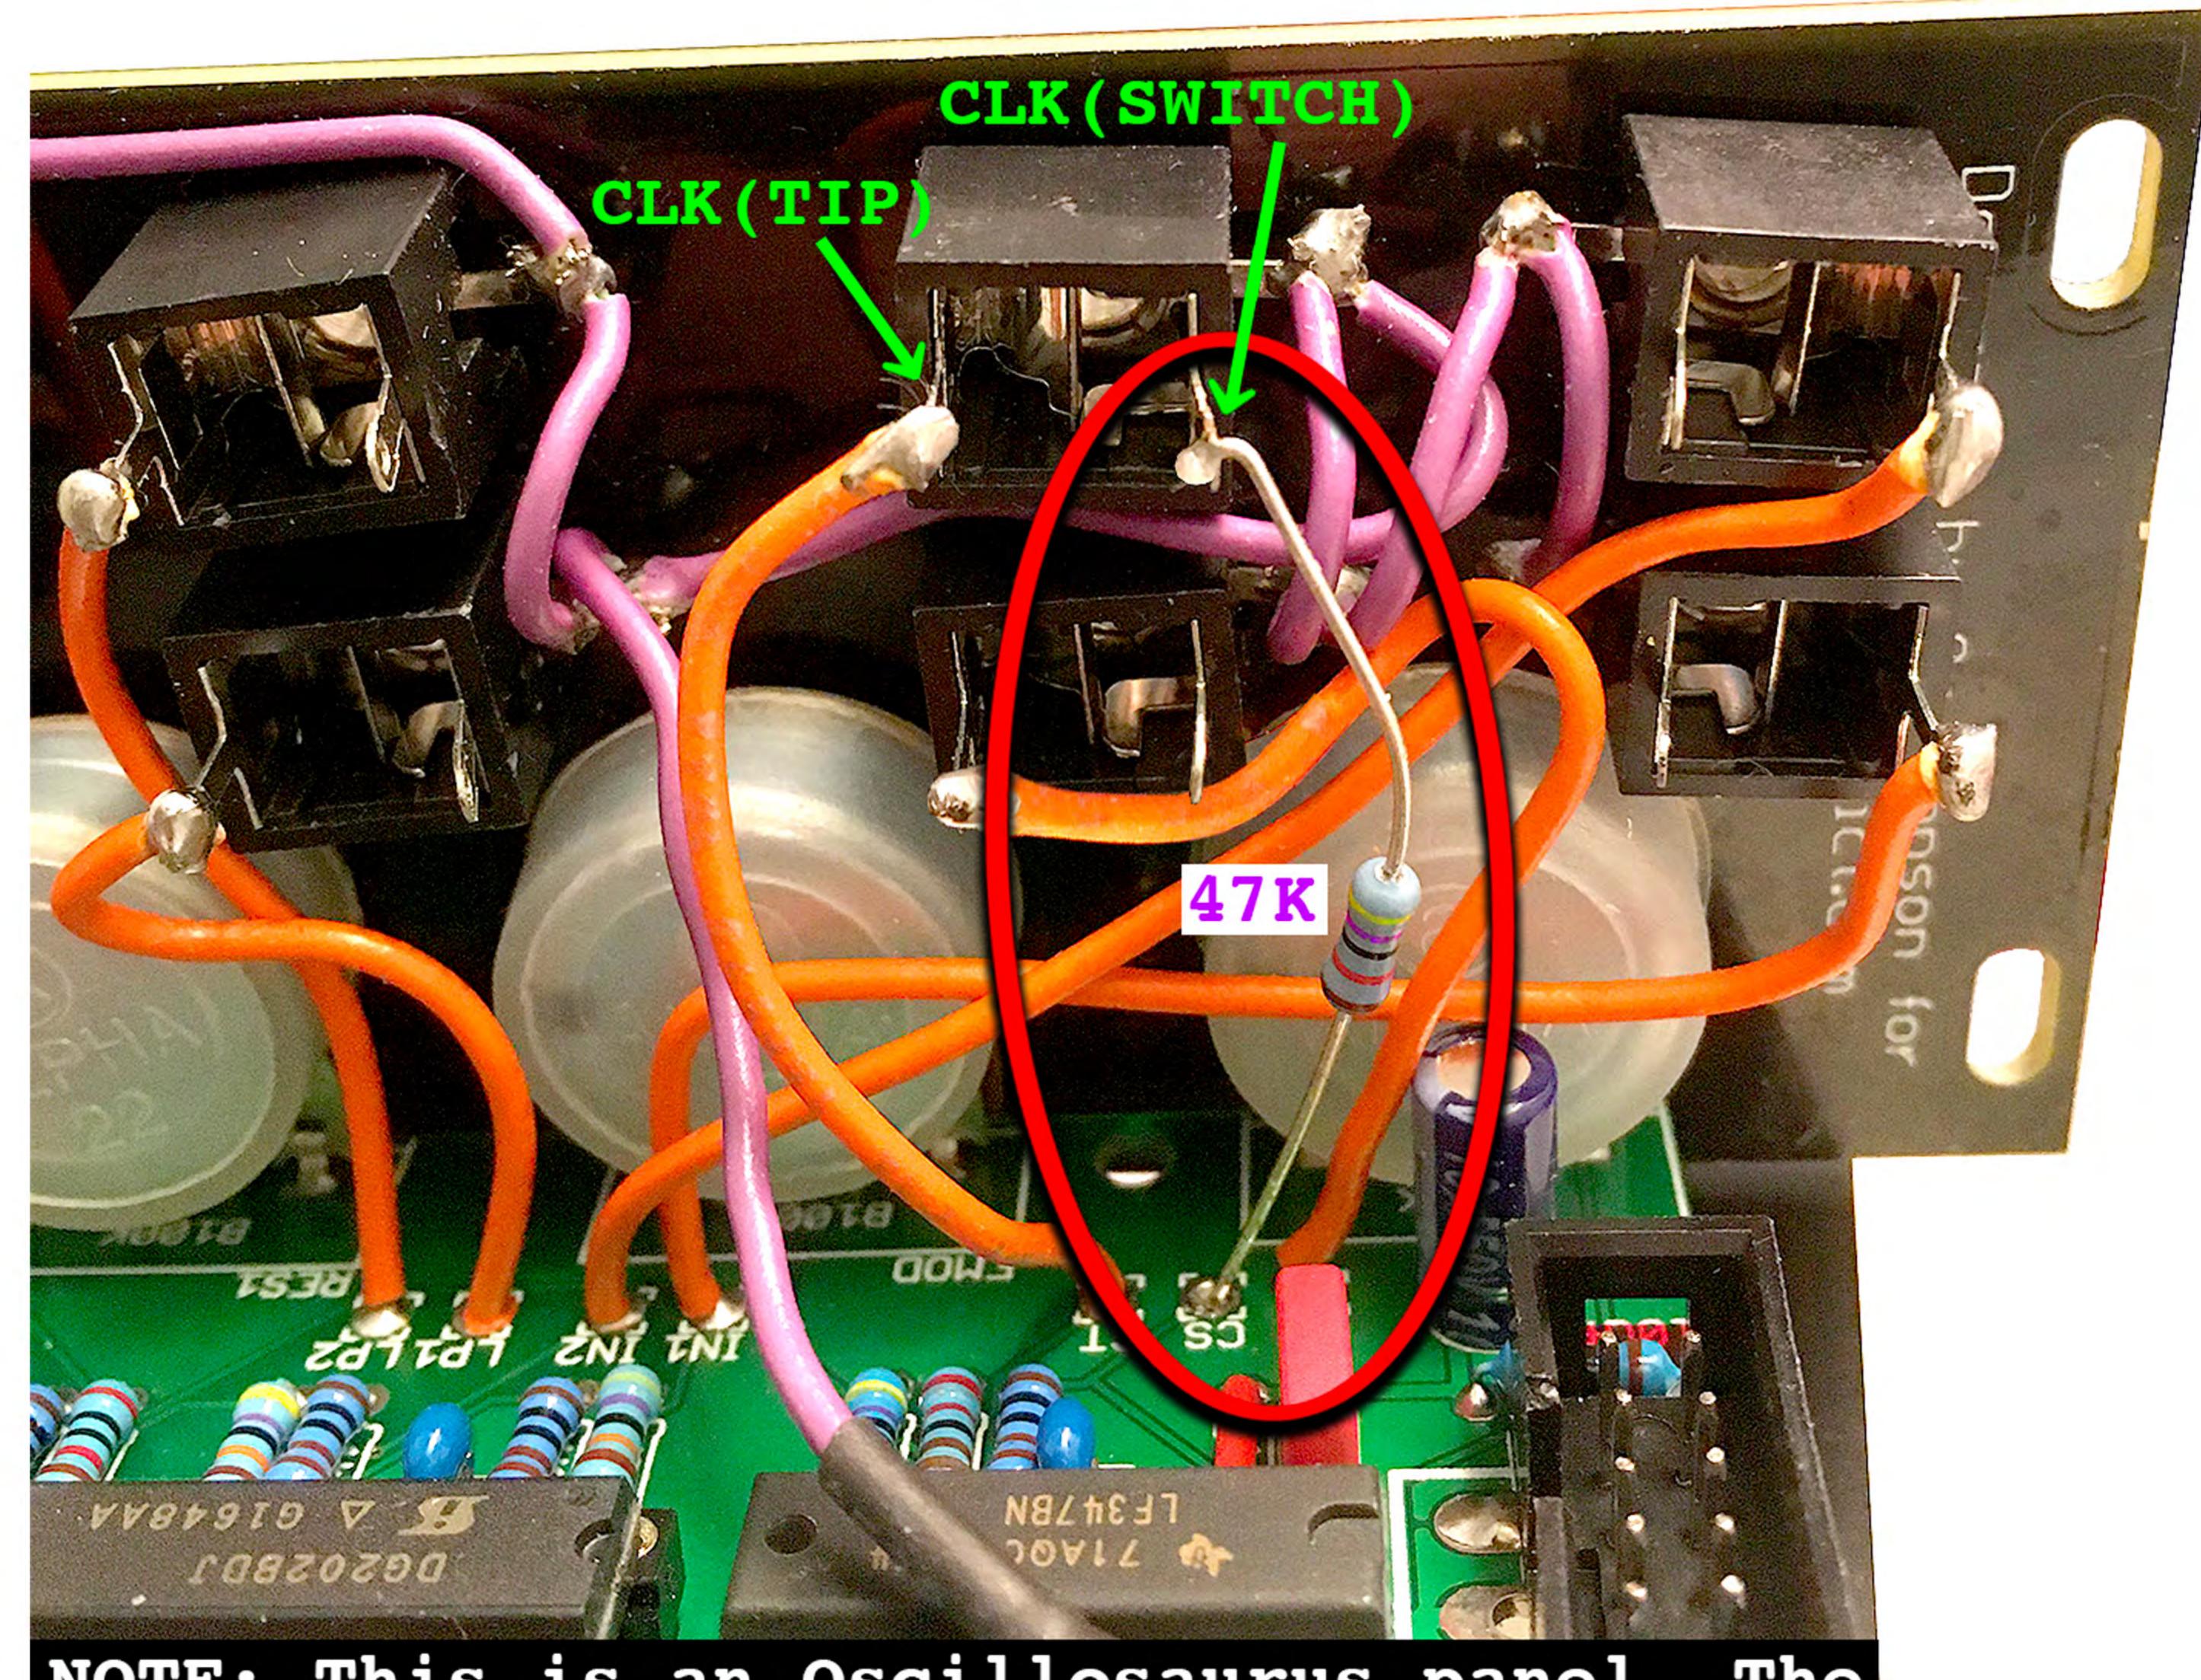

NOTE: This is an Oscillosaurus panel. The location of the jacks are different from what is shown in the Barton Build Docs